
Email : sales@scilabexport.com
Phone: +91-7082934803

**Product Name :**

Coupler PVC, skt, rrj/flange, 200mm x 8"

**Product Code :**

SLE/WDF/30

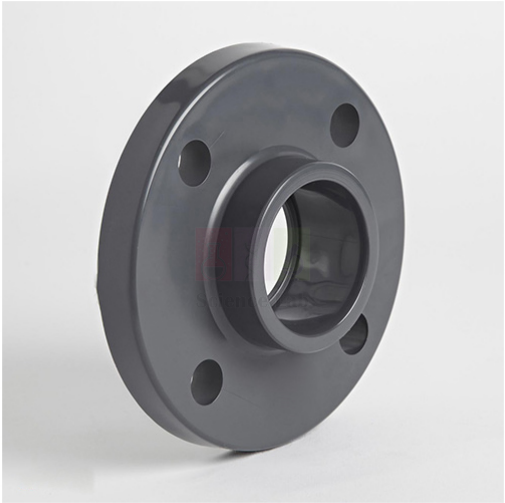

Email : sales@scilabexport.com
Phone: +91-7082934803

# Description :

**Coupler PVC, skt, rrj/flange, 200mm x 8"** (Product Code: SLE/WDF/30) is a uPVC flanged coupling used to connect a 200 mm outside-diameter PVC pipe to 8" nominal-diameter flanged G.I. fittings, valves or equipment on large water mains. One end is a rubber ring socket that the PVC pipe pushes into; the other is a flange that bolts to the metal side. It is supplied by **Jain Scientific Equipments Pvt Ltd (ScienceLab)**, Ambala, India.

## Specifications

| Parameter | Detail |
|---|---|
| Fitting type | Flanged coupling |
| PVC end | Rubber ring socket (rrj), for PVC pipe of 200 mm outside diameter |
| G.I. end | Flange, for G.I. fitting of 8" nominal diameter |
| Material | uPVC (un-plasticised polyvinyl chloride) |
| Pressure rating | 10 bar at 20°C |
| Suitable temperature range | 0 to 50°C |
| Product code | SLE/WDF/30 |
| Supplied by | Jain Scientific Equipments Pvt Ltd (ScienceLab), Ambala, India |

## What Is the 200mm PVC Flanged Coupler Used For?

Large-bore mains usually meet valves, pump stations, meters and older metal pipework at a bolted flange. This coupling bridges the two systems: the 200 mm PVC pipe enters a rubber ring socket, so no solvent cement is used on that side, while the flange bolts to an 8" G.I. flange. Rubber ring joints also allow a little movement, which helps long mains cope with expansion and ground settlement.

Chamfer and clean the pipe spigot, apply a lubricant suitable for the rubber ring, and push the pipe home squarely without twisting the ring out of its groove. On the flange side, use a gasket between the faces and tighten the bolts evenly in a cross pattern. Confirm with us which gasket and bolt set you need, and keep service within 10 bar at 20°C.

## What to Specify When Ordering

- PVC side: 200 mm outside-diameter pipe suitable for rubber ring jointing.
- Flange side: 8" nominal diameter; share your flange drilling standard so we can confirm it matches.
- Gasket, bolts and ring lubricant: say whether you need them sourced with the coupling.
- Quantity: one per flanged connection on the main.

## Supplier

Jain Scientific Equipments Private Limited supplies this 200 mm flanged coupling under the Scien for wate s labor